

EAC

4000



Arm-based Edge AI Computing

NVIDIA® Jetson Orin™ NX/Nano Compact AI Computing System



▲ Traffic Vision



- NVIDIA Jetson Orin™ NX/Nano, up to 100 TOPS AI performance (Orin Nano Super Mode Supported)
- Up to 16GB LPDDR5 RAM with NVMe SSD up to 1TB
- 1 GigE LAN, 4 USB 3.1, 1 HDMI 2.0
- 2 COM RS-232/422/485
- 1 Full-size Mini PCIe with SIM for 4G/Wi-Fi/BT
- Optional Allxon OOB Support

▼ Auto Optical Inspection



▲ Delivery Robot



Vecow

Specifications

System

CPU	XR16 : 8-core Arm® Cortex®-A78AE v8.2 64-bit CPU XR08/AR08/AR04 : 6-core Arm® Cortex®-A78AE v8.2 64-bit CPU
GPU	XR16/XR08/AR08 : NVIDIA Ampere™ architecture w/1024 NVIDIA® CUDA® cores, 32 Tensor cores AR04 : NVIDIA Ampere™ architecture w/512 NVIDIA® CUDA® cores, 16 Tensor cores
DL Accelerator	XR16 : 2 NVDLA Engines XR08 : 1 NVDLA Engines AR08/AR04 : None
Memory	XR16 : 1 LPDDR5 DRAM, 16GB XR08/AR08 : 1 LPDDR5 DRAM, 8GB AR04 : 1 LPDDR5 DRAM, 4GB
Software Support	- Linux - NVIDIA JetPack SDK

I/O Interface

USB	4 USB 3.1 Type A
Micro USB	1 Micro USB Flash Port
Button	- 1 Power Button - 1 Force Recovery Button - 1 Reset Button
LED	Power, SSD
SIM	1 Nano SIM Card Socket
Antenna	2 Antenna for WiFi/4G
Serial	2 COM RS-232/422/485

Expansion

Mini PCIe	1 Mini PCIe (Full-size, PCIe, USB 2.0)
-----------	--

Graphics

Video Encode	XR16/XR08 : - HEVC : 1x 4K @60, 3x 4K @30, 6x 1080p @60, 12x 1080p @30 - H.264 : 1x 4K @60, 2x 4K @30, 5x 1080p @60, 11x 1080p @30
Video Decode	XR16/XR08 : - HEVC : Up to 1x 8K @30, 2x 4K @60, 4x 4K @30, 9x 1080p @60, 18x 1080p @30 - H.264 : Up to 1x 4K @60, 2x 4K @30, 5x 1080p @60, 11x 1080p @30 AR08/AR04 : - HEVC : Up to 1x 4K @60, 2x 4K @30, 5x 1080p @60, 11x 1080p @30 - H.264 : Up to 1x 4K @30, 3x 1080p @60, 7x 1080p @30
Interface	1 HDMI 2.0, up to 4K@60

Storage

M.2	1 M.2 Key M Socket (2242, PCIe 4.0 x4)
-----	--

Ethernet

LAN	10/100/1000 Base-T GigE LAN, RJ45 Connector
-----	---

Power

Power Input	12V DC Power Input
Power Interface	3-pin 3.5mm Terminal Block V+, V-

Out-of-Band Management (EAC-4000-OOB)

MCU	Nuvoton NUC980
Interface	- 1 10/100Mb Ethernet LAN, RJ45 Connector - 1 Full-Size Mini PCIe Socket (USB) - 1 Nano SIM
Remote Management	Support Remote Power ON/OFF, Reset and Power Cycling, Cloud Serial Console. Powered By Allxon.

Others

TPM	Infineon SLB9673 supports TPM 2.0 (Optional)
-----	--

Environment

Operating Temperature	15W TDP Mode : -25°C to 55°C 25W TDP Mode : -25°C to 45°C
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Humidity	5% to 95% Humidity, non-condensing
Relative Humidity	95% @55°C
Shock	Operating, MIL-STD-810G, Method 516.7, Procedure I
Vibration	Operating, MIL-STD-810G, Method 514.6, Procedure I, Category 4
EMC	CE, FCC, EN50155, EN50121-3-2, EN62368-1, MIL-STD-810G

* All product information may subject to change without prior notice.

* The rights of all brand names, product names and trademarks belong to their respective owners.

Copyright © 2025 Vecow Co., Ltd. All rights reserved.

Mechanical

Dimensions	EAC-4000 : 112 x 103 x 45 mm (4.41" x 4.05" x 1.73") EAC-4000-OOB : 112 x 103 x 66 mm (4.41" x 4.05" x 2.6")
Weight	EAC-4000 : 0.6 kg (1.32 lb) EAC-4000-OOB : 0.8kg (1.76lb)
Mounting	- Wallmount - DIN Rail (Optional)

Order Information

Model	Platform	RAM	LAN	USB 3.1	Serial	SIM	HDMI	Antenna
4000-XR16 -SXXX*-(OOB)	Jetson Orin NX	16GB	1	4	2	1	1	2
4000-XR08 -SXXX*-(OOB)		8GB						
4000-AR08 -SXXX*-(OOB)	Jetson Orin Nano	8GB	1	4	2	1	1	2
4000-AR04 -SXXX*-(OOB)		4GB						

*A NVMe SSD is included in default. Please refer to NVMe SSD List to select NVMe SSD capacity.

NVMe SSD List

S128	128GB NVMe SSD	S512	512GB NVMe SSD
S256	256GB NVMe SSD	S01T	1TB NVMe SSD


Accessories

PWA-60WP3-WT-12V	60W, 12V, 90V AC to 264V AC Power Adaptor for 3 PIN 5.0mm Terminal Block, -30°C~+70°C
PWA-135W-WT-12V	135W, 12V, 85V AC to 264V AC Power Adapter with 3-pin Terminal Block, Wide Temperature -30°C to +70°C
DIN-RAIL	DIN Rail Kit
M.2 Storage Module	M.2 Key M PCIe Storage Module
4G Module	4G/GPS Module with Antenna
WiFi & Bluetooth	WiFi & Bluetooth Module with Antenna



Dimensions & Drawing

Unit : mm (inch)

EAC-4000

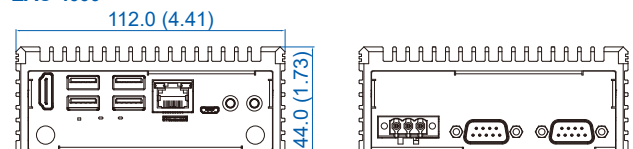

EAC-4000-OOB

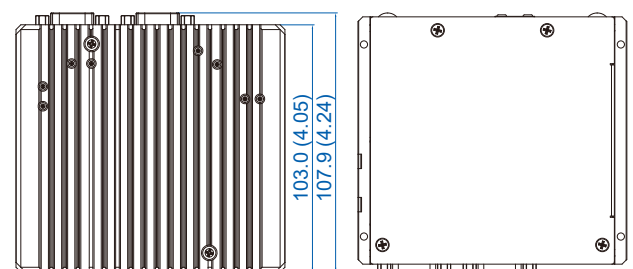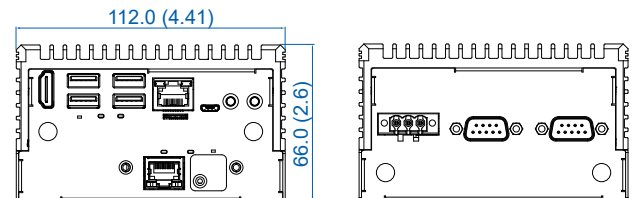

* All product information may subject to change without prior notice.

* The rights of all brand names, product names and trademarks belong to their respective owners.

Copyright © 2025 Vecow Co., Ltd. All rights reserved.